



A Solution that Never Sleeps - Protecting Residence Communities and Office Buildings -


Whether keeping an eye on front door or monitoring the house or office while on vacation, the security and peace of mind provided is priceless. Hikvision brings a high resolution analog surveillance solution to protect your residence communities and office buildings. The combined solution with front-end analog cameras of up to 650TVL and the matched 960H standalone DVR allows truly HD monitoring, ensuring the safety of people and protection of your property.

- The 650TVL analog cameras ensure enhanced image quality and thus better safety.
- The 960H DVR supports up to eight HDDs (4TB each) to ensure video recording for a long period of time (over 30 days). The DVR supports video inputs of up to 16 channels with 2~3 Mbps bit rate at each channel, achieving clear and smooth video viewing.
- Simultaneous HDMI and VGA output, the up to 1920x1080P image resolution ensures high quality video display and playback.
- Instant uploading of audio and alarm information for security staff's notification.

Wants To Know More?

www.hikvision.com

First Choice for Security Professionals

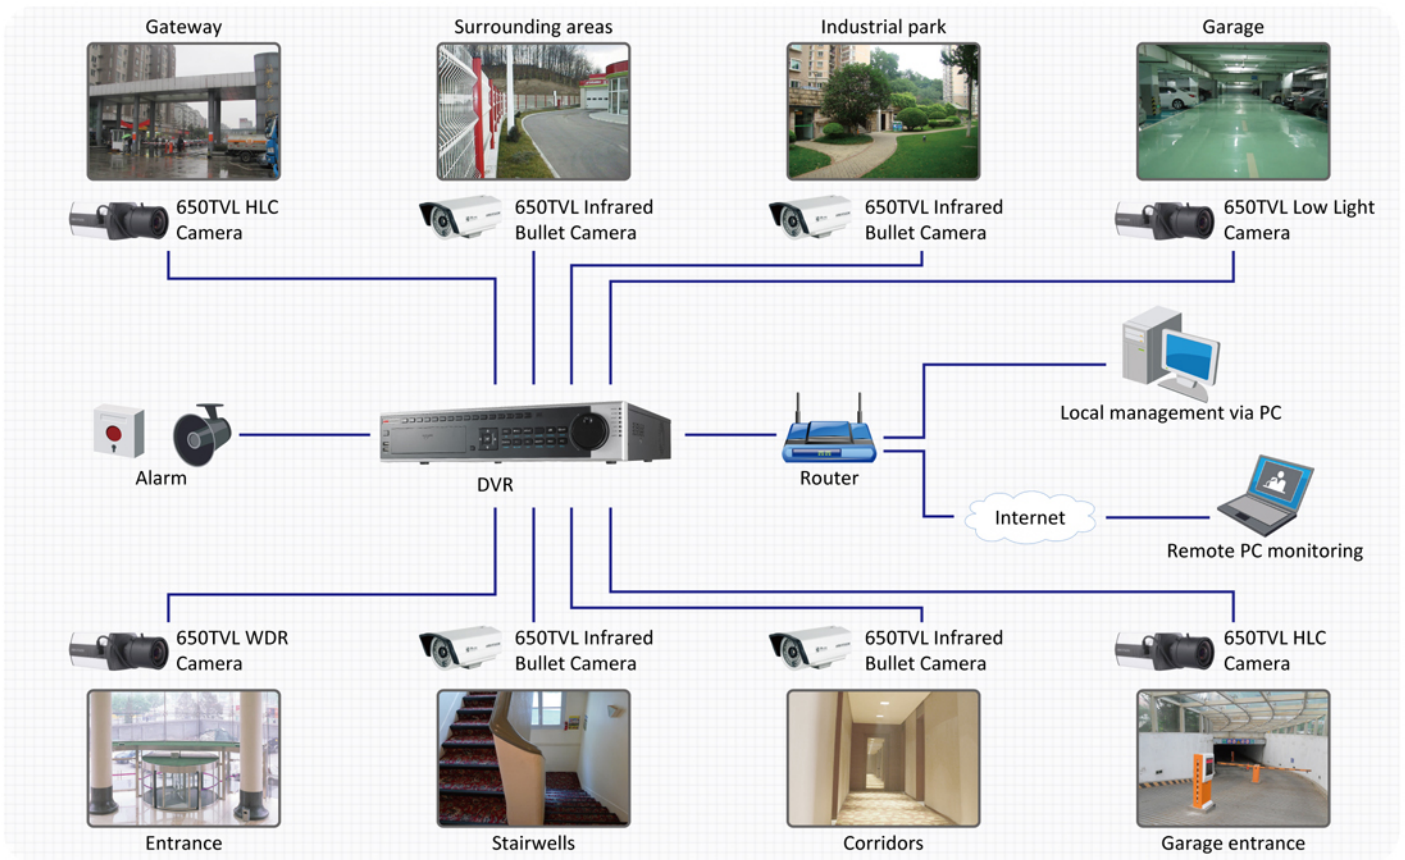

Recommended Products



- DS-2CC1197P-A**
650TVL WDR Camera
- 1/3" Sony Super HAD CCD II
 - Min. illumination: 0.001 lux @ F1.2
 - 75dB wide dynamic range
 - 3D DNR, EIS, OSD menu
 - True day / night



- DS-2CC1198P-A**
650TVL HLC Camera
- 1/3" Sony EXVIEW HAD CCD II
 - Min. illumination: 0.001 lux @ F1.2
 - True day / night
 - Excessive high light compensation
 - 3D DNR, Digital WDR, EIS



- DS-2CC1195P-A**
650TVL Low Light Camera
- 1/3 inch Sony EXVIEW HAD CCD II
 - Min. illumination: 0.001 lux @ F1.2
 - 3D DNR, Digital WDR, Smart IR
 - True day / night
 - OSD menu



- DS-2CC1192P-IR1/IR3/IR5**
650TVL Infrared Bullet Camera
- 1/3 inch Sony EXview HAD CCD II
 - Min. illumination: 0.001 lux @ F1.2, 0 lux (IR LED On)
 - Electronic day & night
 - IP66 rating
 - IR range: 20m (-IR1), 40m (-IR3), 60m (-IR5)



- DS-8100HWI-ST**
960H Standalone DVR
- HDMI and VGA output at 1920 x 1080 resolution
 - WD1(PAL: 960x576, NTSC: 960 x 480) resolution real time recording
 - HDD quota and group management

- Redundant systems design
- 8 SATA interfaces, up to 4 TB per HDD
- Full channel simultaneous playback